


120 SERIES AREA

- General area fixed downlight
- Reduced glare with dark light appearance
- Various reflector and lumen options
- Supplied with pre-wired non dimming driver
- Ideal replacement for halogen and metal halide

700/1000/1300lm CRI 80+ 2000lm CRI 80+ 3000/4000lm CRI 80+
700/1000/1300lm CRI 98 2000/3000lm CRI 98

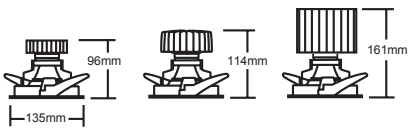

PRODUCT CODE

Lumen Output:

(07)	700 lm
(10)	1000 lm
(13)	1300 lm
(20)	2000 lm
(30)	3000 lm
(40)	4000 lm

Colour Temps:

(27)	2700K
(30)	3000K
(35)	3500K
(40)	4000K

Colour Rendering:

(V8)	Vibrancy 80
(V9)	Vibrancy 98
(80)	CRI 80+
(98)	CRI 98

(CRI98 / V9 up to 3000 lumens)


Beam Angles:

(N)	Narrow: 20°
(M)	Medium: 40°
(W)	Wide: 70°

(20° up to 2000lm CRI 80 & 2000 CRI 98)

Colour:

(W)	White
-----	-------

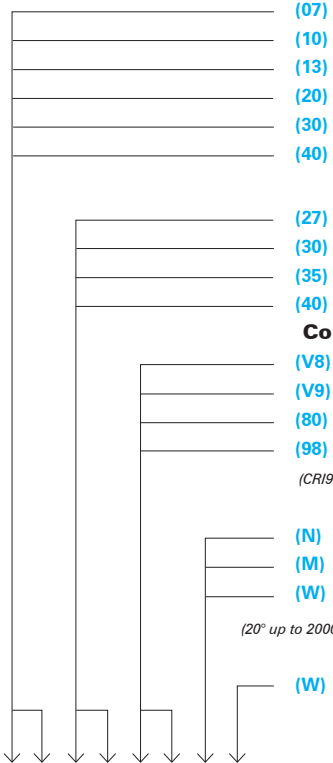

W2

Options: _____ / ** / **

- Dimming:**
- /DT Trailing Edge
 - /DL Leading Edge
 - /DD DALI
 - /DA Analogue (1-10V)
 - /LT Lumentalk
 - /M3 3Hrs Maintained
 - /ST Self Test
 - /DE DALI Emergency

(Other dimming options available see page 123)

