


# 100 SERIES BASIC

- Small tiltable recessed downlight
- Die-cast construction
- Low height design
- Supplied with pre-wired remote non-dimming driver
- Ideal for halogen replacement



Tilt: 30°

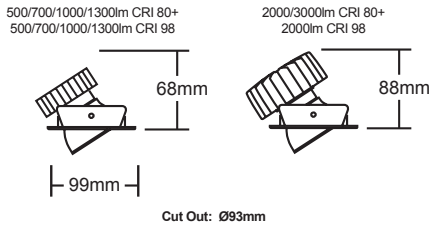

## PRODUCT CODE

### Lumen Output:

(05)	500 lm
(07)	700 lm
(10)	1000 lm
(13)	1300 lm
(20)	2000 lm
(30)	3000 lm

### Colour Temps:

(27)	2700K
(30)	3000K
(35)	3500K
(40)	4000K

### Colour Rendering:

(V8)	Vibrancy 80
(V9)	Vibrancy 98
(80)	CRI 80+
(98)	CRI 98



(CRI 98 / V9 up to 2000 lumens)

### Beam Angles:

(M)	Medium: 40°
(W)	Wide: 70°

### Colour:

(W)	White
-----	-------

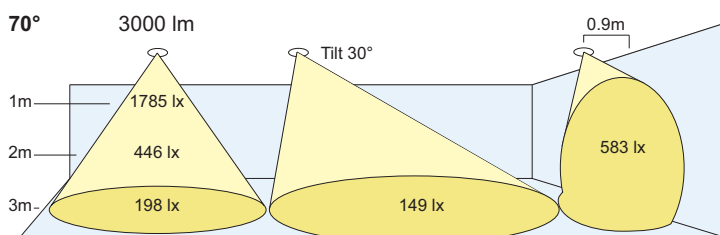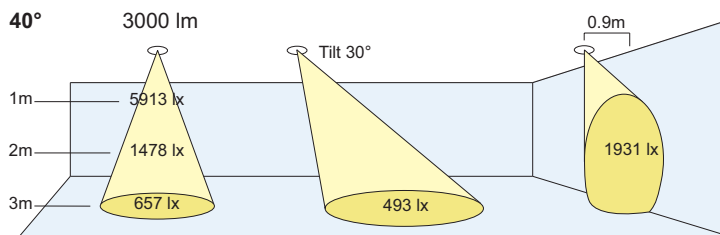

B1

---/\*\*/---

### Options:

#### Dimming:

- /DT Trailing Edge
- /DL Leading Edge
- /DD DALI
- /DA Analogue (1-10V)
- /LT Lumentalk

/M3 3Hrs Maintained

/ST Self Test

/DE DALI Emergency

(Other dimming options available see page 123)