



TRACK AND SPOTS CHIME

- High output adjustable track mounted spotlight
- Die-cast construction
- Three circuit track adaptor as standard
- Narrow beam option for high accent factor (10°)
- Supplied with integral non-dimming driver
- Lockable tilt and rotation



/RD Rotary Dimming

Allows individual dimming on standard track

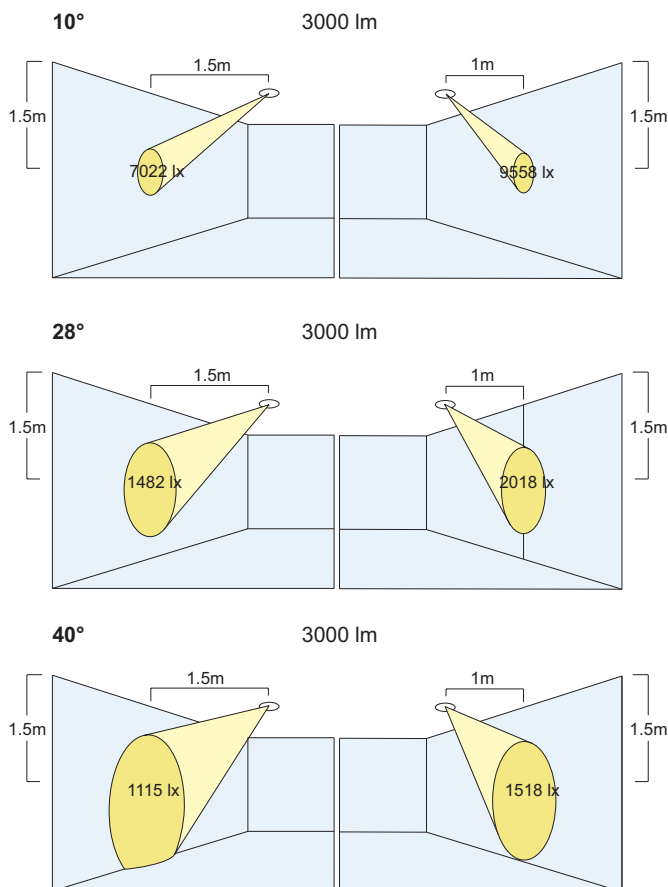

PRODUCT CODE

Lumen Output:

(07)	700 lm
(10)	1000 lm
(13)	1300 lm
(20)	2000 lm
(30)	3000 lm

Colour Temps:

(27)	2700K
(30)	3000K
(35)	3500K
(40)	4000K

Colour Rendering:

(V8)	Vibrancy 80
(V9)	Vibrancy 98
(80)	CRI 80+
(98)	CRI 98

(CRI/98 / V9 up to 2000 lumens)


Beam Angles:

(S)	Spot: 10°
(N)	Narrow: 28°
(M)	Medium: 40°

Colour:

(W)	White
(B)	Black

CH

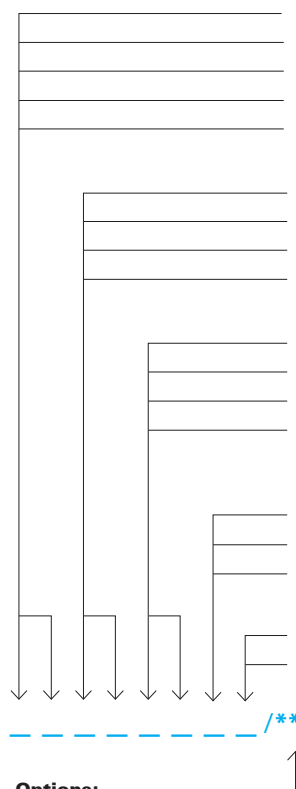

Options:

- Dimming:**
- /DT** Trailing Edge
- /DL** Leading Edge
- /DD** DALI
- /DA** Analogue (1-10V)

(Other dimming options available see page 123)