
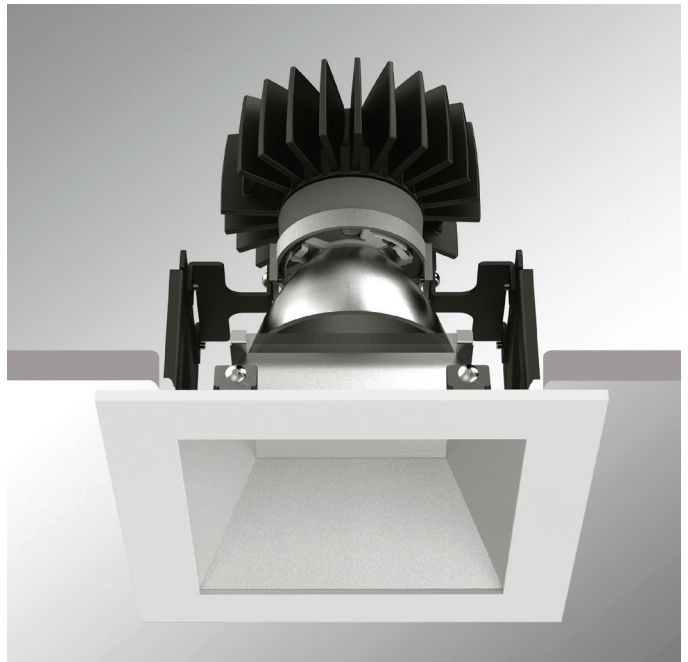



GYRO SERIES CUBE DOWNLIGHT

- Fixed downlight
- Die-cast construction
- AlphaLED Fast Fix mechanism
- Supplied with pre-wired remote non-dimming driver
- Glare control accessories available
- Supplied with a ribbed spreader lens



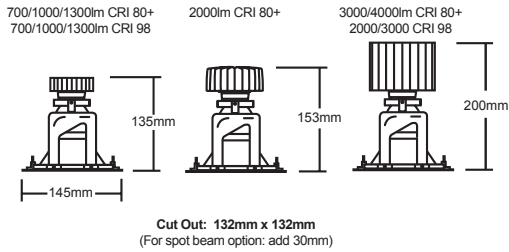


Accessories

To order, use the following suffix



/SL Softening Lens

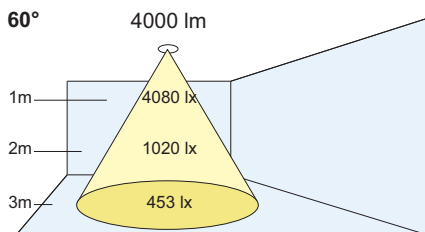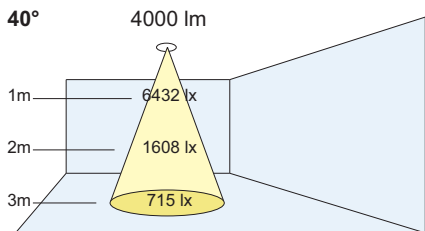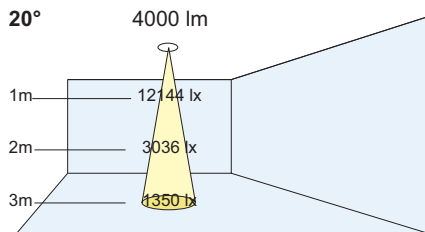

PRODUCT CODE

Lumen Output:

- (07) 700 lm
- (10) 1000 lm
- (13) 1300 lm
- (20) 2000 lm
- (30) 3000 lm
- (40) 4000 lm

Colour Temps:

- (27) 2700K
- (30) 3000K
- (35) 3500K
- (40) 4000K

Colour Rendering:

- (V8) Vibrancy 80
 - (V9) Vibrancy 98
 - (80) CRI 80+
 - (98) CRI 98
- (CRI 98 /V9 up to 3000 lumens)


Beam Angles:

- (S) Spot: 10°
 - (N) Narrow: 20°
 - (M) Medium: 40°
 - (W) Wide: 60°
- (10° up to 2000lm CRI 80 & 2000 CRI 98)

Colour:

- (W) White
- (N) Nickel Satin
- (B) Black

CD

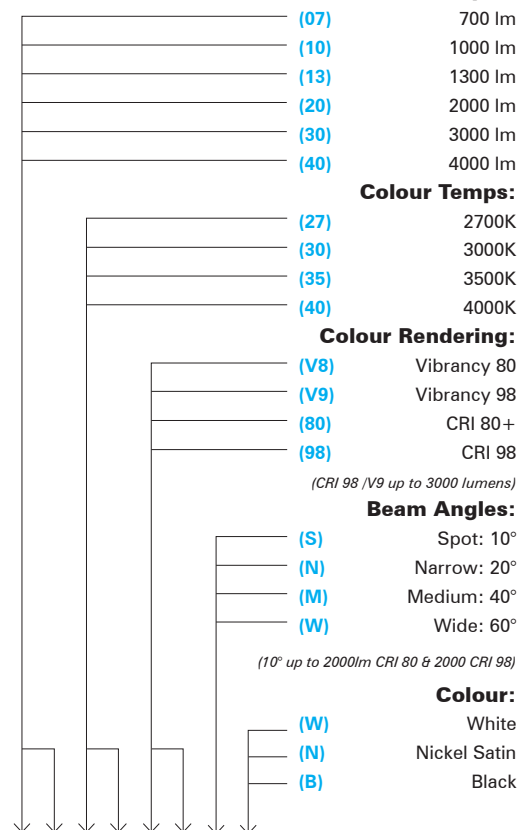

Options:

- Dimming:**
- /DT Trailing Edge
- /DL Leading Edge
- /DD DALI
- /DA Analogue (1-10V)
- /LT Lumentalk
- /M3 3Hrs Maintained
- /ST Self Test
- /DE DALI Emergency

(Other dimming options available see page 123)