


70 SERIES IMP


- Small tiltable recessed downlight
- Die-cast construction
- Black inner housing detail
- Supplied with pre-wired remote non-dimming driver
- Glare control and baffle accessories
- Small cut out for halogen replacement

500lm CRI 80+ 700/1000/1300lm CRI 80+ / 500/700/1000/1300lm CRI 98 2000lm CRI 80+

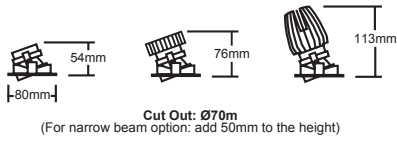

Accessories


To order, use the following suffix

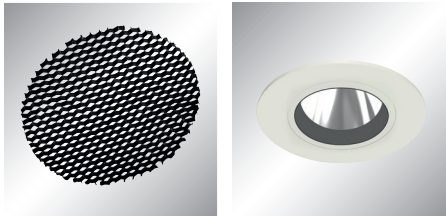

- /HL** Honeycomb louvre
- /SL** Softening Lens
- /CG** Clear glass
- /BF** Baffle

Baffle

Nickel Satin



PRODUCT CODE

Lumen Output:

- (05) 500 lm
- (07) 700 lm
- (10) 1000 lm
- (13) 1300 lm
- (20) 2000 lm

Colour Temps:

- (27) 2700K
- (30) 3000K
- (35) 3500K
- (40) 4000K

Colour Rendering:



- (V8) Vibrancy 80
 - (V9) Vibrancy 98
 - (80) CRI 80+
 - (98) CRI 98
- (CRI 98 / V9 up to 1300 lumens)*

Beam Angles:

- (N) Narrow: 20°
 - (M) Medium: 40°
 - (W) Wide: 70°
- (20° up to 1300lm CRI 80 & 1300 CRI 98)*

Colour:

- (W) White
- (N) Nickel Satin

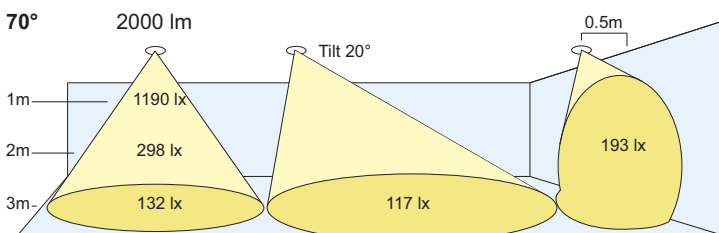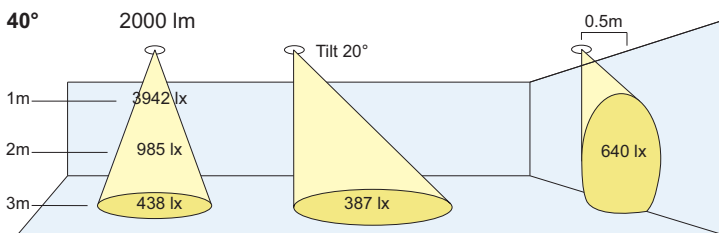

IM

---/**/---

Options:

Dimming:

- /DT** Trailing Edge
- /DL** Leading Edge
- /DD** DALI
- /DA** Analogue (1-10V)
- /LT** Lumentalk

(Other dimming options available see page 123)

- /M3** 3Hrs Maintained
- /ST** Self Test
- /DE** DALI Emergency