


**70 SERIES**

# IMP SOFT ROUND TILT


- Adjustable downlight
- Die-cast construction
- Glare control secondary reflector with fixed 30° angle
- Supplied with pre-wired remote non-dimming driver
- Small cut out for halogen replacement

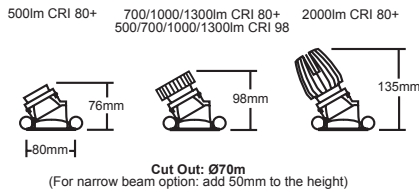

Tilt: 30°


**Accessories**

To order, use the following suffix

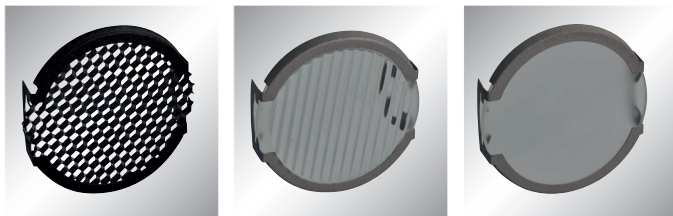

- /HL Honeycomb louvre
- /SL Softening Lens
- /RG Ribbed Spreading Glass
- /CG Clear glass

**PRODUCT CODE**

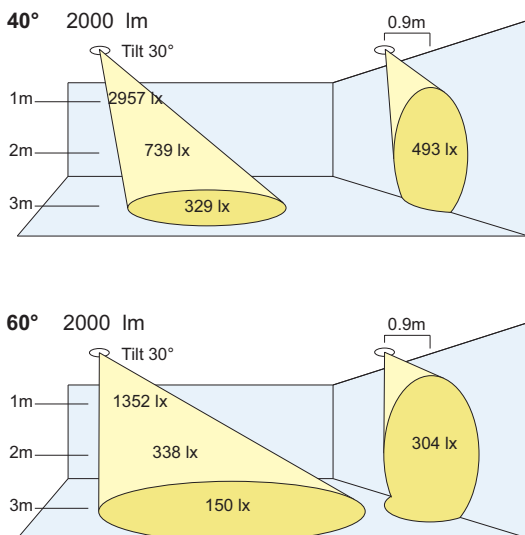

**Lumen Output:**

- (05) 500 lm
- (07) 700 lm
- (10) 1000 lm
- (13) 1300 lm
- (20) 2000 lm

**Colour Temps:**

- (27) 2700K
- (30) 3000K
- (35) 3500K
- (40) 4000K

**Colour Rendering:**

- (V8) Vibrancy 80
- (V9) Vibrancy 98
- (80) CRI 80+
- (98) CRI 98

(CRI 98 / V9 up to 1300 lumens)

**Beam Angles:**

- (N) Narrow: 20°
- (M) Medium: 40°
- (W) Wide: 60°

(20° up to 1300lm CRI 80 & 1300 CRI 98)

**Colour:**

- (W) White
- (N) Nickel Satin

**S2** --- **Options:** **Dimming:**

- /DT Trailing Edge
- /DL Leading Edge
- /DD DALI
- /DA Analogue (1-10V)
- /LT Lumentalk
- /M3 3Hrs Maintained
- /ST Self Test
- /DE DALI Emergency

(Other dimming options available see page 123)