


# GYRO SERIES LED111-2




- Twin high output gimbal downlight with gyroscopic movement
- Die-cast and steel construction
- AR111 retrofit luminaire
- Supplied with pre-wired remote non-dimming driver



30°

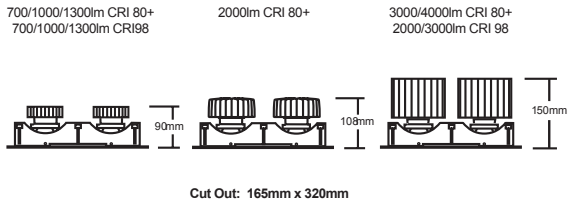

Calculations for x1 optic

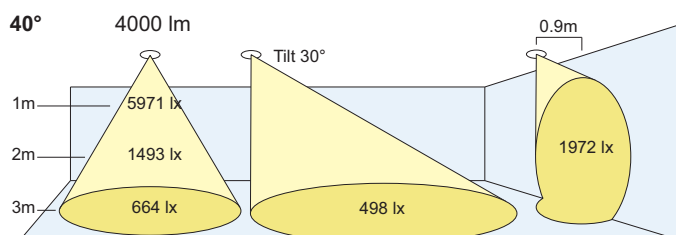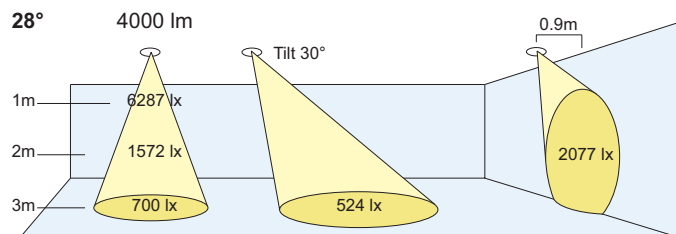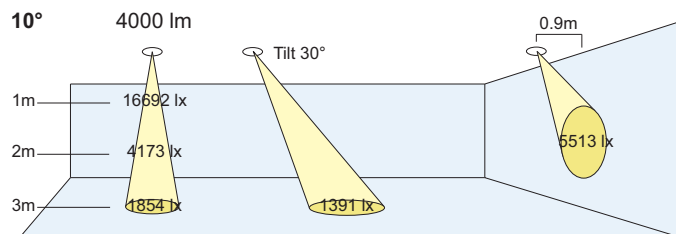

## PRODUCT CODE

### Lumen Output:

(07)	700 lm
(10)	1000 lm
(13)	1300 lm
(20)	2000 lm
(30)	3000 lm
(40)	4000 lm

### Colour Temps:

(27)	2700K
(30)	3000K
(35)	3500K
(40)	4000K

### Colour Rendering:

(V8)	Vibrancy 80
(V9)	Vibrancy 98
(80)	CRI 80+
(98)	CRI 98

(CRI 98 / V9 up to 3000 lumens)


### Beam Angles:

(S)	Spot: 10°
(N)	Narrow: 28°
(M)	Medium: 40°

### Colour:

(W)	White
-----	-------

2L

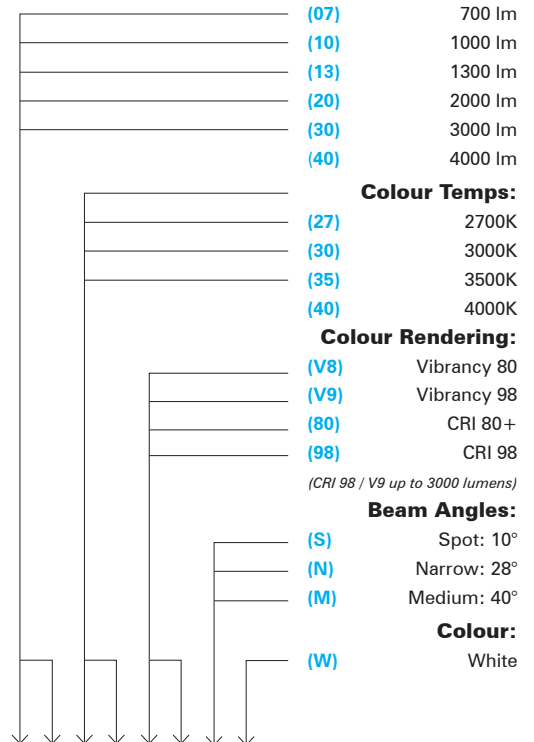

- Options:
- Dimming:**
- /DT Trailing Edge
  - /DL Leading Edge
  - /DD DALI
  - /DA Analogue (1-10V)
  - /LT Lumentalk
- /M3 3Hrs Maintained
- /ST Self Test
- /DE DALI Emergency
- (Other dimming options available see page 123)