


GYRO SERIES LED111

- High output gimbal downlight with gyroscopic movement
- Die-cast and steel construction
- AR111 retrofit luminaire
- Supplied with pre-wired remote non-dimming driver

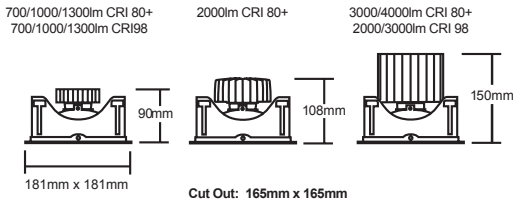

PRODUCT CODE

Lumen Output:

- (07) 700 lm
- (10) 1000 lm
- (13) 1300 lm
- (20) 2000 lm
- (30) 3000 lm
- (40) 4000 lm

Colour Temps:

- (27) 2700K
- (30) 3000K
- (35) 3500K
- (40) 4000K

Colour Rendering:

- (V8) Vibrancy 80
- (V9) Vibrancy 98
- (80) CRI 80+
- (98) CRI 98

(CRI 98 / V9 up to 3000 lumens)

Beam Angles:

- (S) Spot: 10°
- (N) Narrow: 28°
- (M) Medium: 40°

Colour:

- (W) White

GL

Options:

- Dimming:**
 - /DT Trailing Edge
 - /DL Leading Edge
 - /DD DALI
 - /DA Analogue (1-10V)
 - /LT Lumentalk
 - /M3 3Hrs Maintained
 - /ST Self Test
 - /DE DALI Emergency
- (Other dimming options available see page 123)

Calculations for x1 optic

