




TRACK AND SPOTS METROPOLE 2

- High output adjustable track mounted spotlight
- Smooth professional dimming available (down to 0.1%)
- Die-cast construction
- Three circuit track adaptor as standard
- Narrow beam option for high accent factor
- Supplied with integral non-dimming driver
- Lockable tilt and rotation



Accessories

To order, use the following suffix

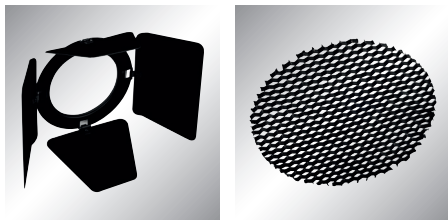

- /BD** Barn Doors
- /HL** Honeycomb louvre
- /RD** Rotary Dimming
- /AW** White Front Ring
Allows individual dimming on standard track

PRODUCT CODE

Lumen Output:

- (07) 700 lm
- (10) 1000 lm
- (13) 1300 lm
- (20) 2000 lm
- (30) 3000 lm
- (40) 4000 lm

Colour Temps:

- (27) 2700K
- (30) 3000K
- (35) 3500K
- (40) 4000K

Colour Rendering:


- (V8) Vibrancy 80
 - (V9) Vibrancy 98
 - (80) CRI 80+
 - (98) CRI 98
- (CRI98 / V9 up to 3000 lumens)*

Beam Angles:


- (S) Spot: 10°
- (N) Narrow: 28°
- (M) Medium: 40°

Colour:

- (W) White
- (B) Black

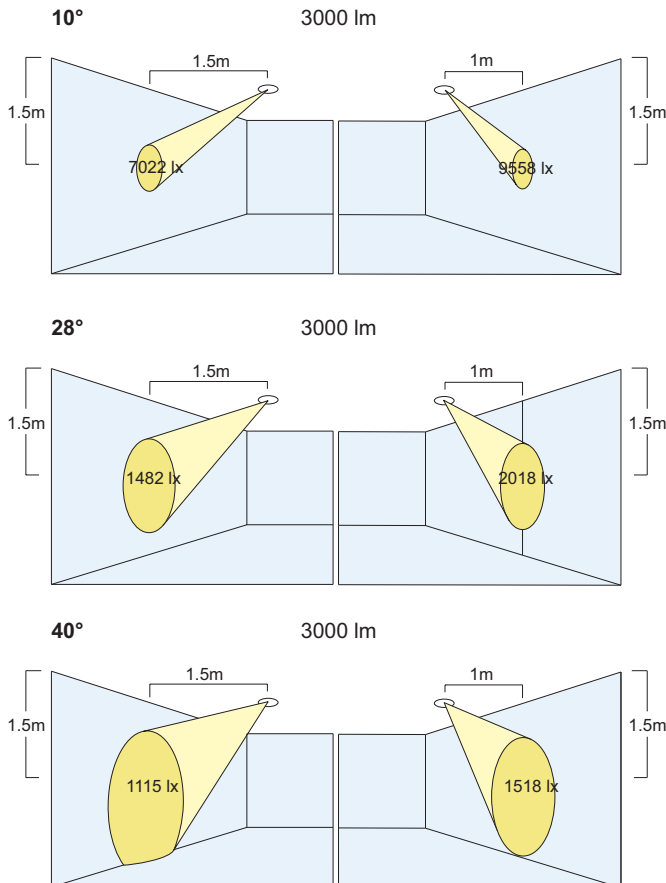

ML

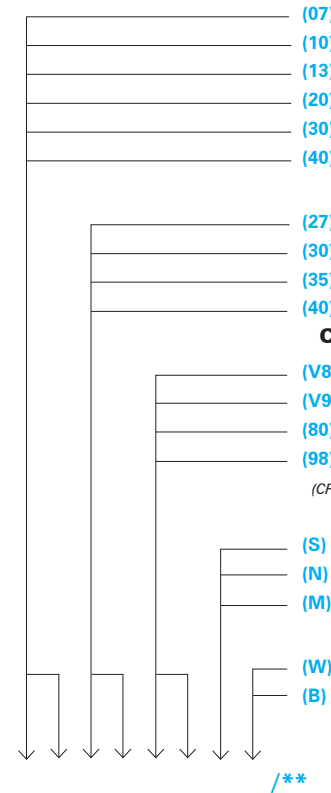

Options:

- Dimming:**
- /DT** Trailing Edge
- /DL** Leading Edge
- /DD** DALI
- /DA** Analogue (1-10V)
- /LT** Lumentalk

(Other dimming options available see page 123)