


# 120 SERIES NIMBLE

- Adjustable downlight with minimal trim
- Various reflector and lumen options
- Supplied with pre-wired non dimming driver
- AlphaLED Fast Fix mechanism
- Ideal replacement for halogen and metal halide


700/1000/1300lm CRI 80+  
700/1000/1300lm CRI 98

2000lm CRI 80+

3000/4000lm CRI 80+  
2000/3000lm CRI 98

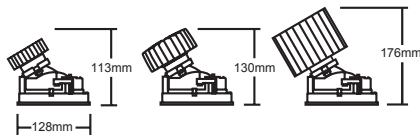

Cut Out: Ø122mm  
(For Spot beam option: add 30mm to the height)






White



Black

Matt

Specular

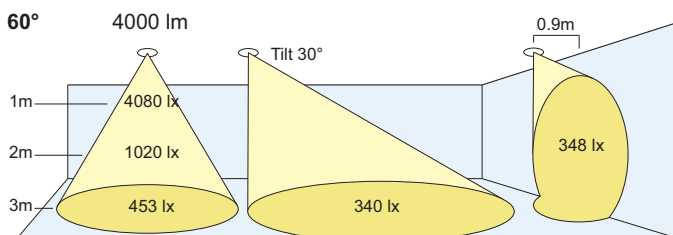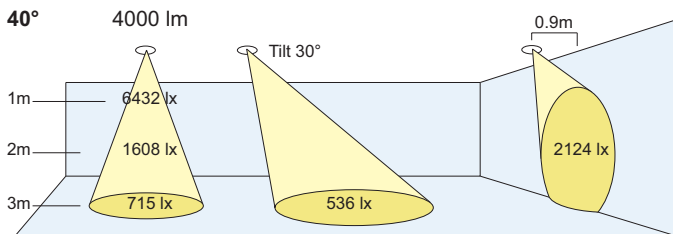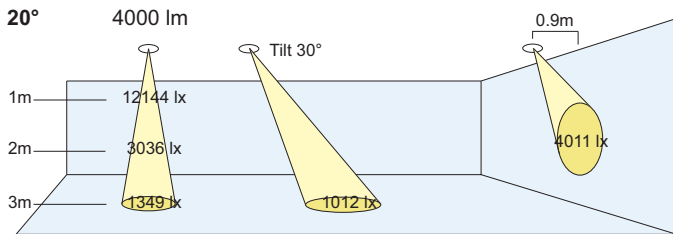

## PRODUCT CODE

### Lumen Output:

(07)	700 lm
(10)	1000 lm
(13)	1300 lm
(20)	2000 lm
(30)	3000 lm
(40)	4000 lm

### Colour Temps:

(27)	2700K
(30)	3000K
(35)	3500K
(40)	4000K

### Colour Rendering:

(V8)	Vibrancy 80
(V9)	Vibrancy 98
(80)	CRI 80+
(98)	CRI 98

*(CRI 98 / V9 up to 3000 lumens)*

### Beam Angles:


(S)	Spot: 10°
(N)	Narrow: 20°
(M)	Medium: 40°
(W)	Wide: 60°

*(10° up to 2000lm CRI 80 & 2000 CRI 98)*

### Colour:

(S)	Specular
(M)	Matt
(B)	Black
(W)	White

N1

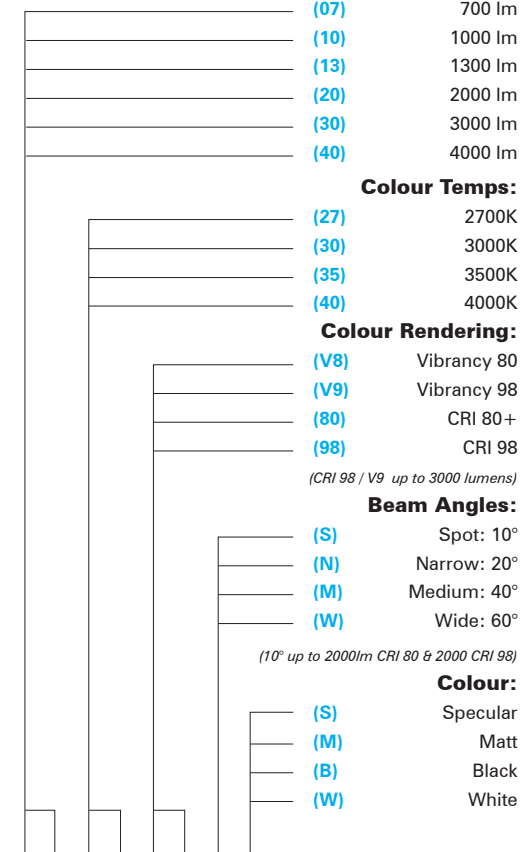

### Options:

- Dimming:**
- /DT Trailing Edge
  - /DL Leading Edge
  - /DD DALI
  - /DA Analogue (1-10V)
  - /LT Lumentalk
  - /M3 3Hrs Maintained
  - /ST Self Test
  - /DE DALI Emergency
- (Other dimming options available see page 123)*