
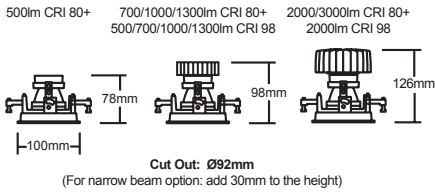


90 SERIES


PIN HOLE SQUARE

- Recessed square low glare downlight
- Die-cast construction
- AlphaLED Fast Fix mechanism
- Black glare control baffle
- Supplied with pre-wired remote non-dimming driver


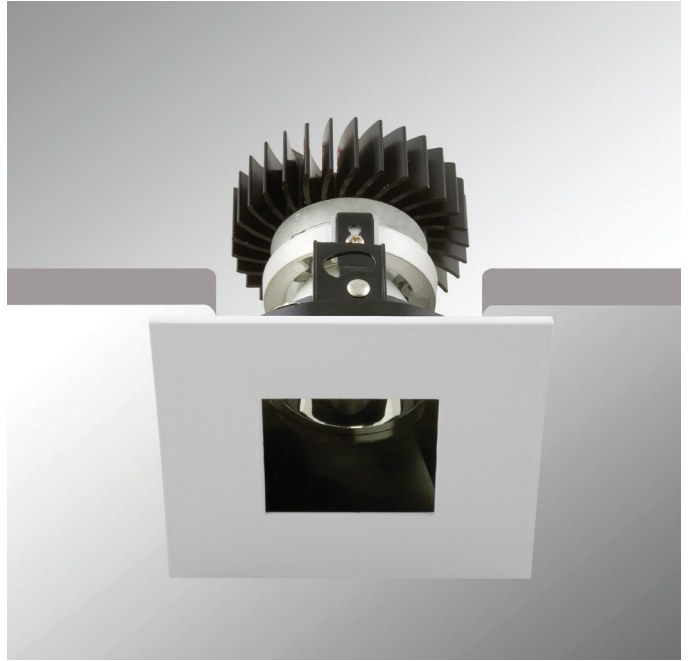


Accessories

To order, use the following suffix

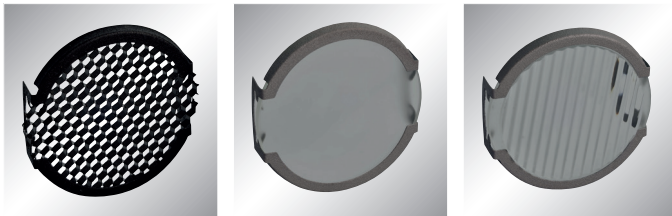

- /HL Honeycomb louvre
- /SL Softening Lens
- /RG Ribbed Spreading Glass

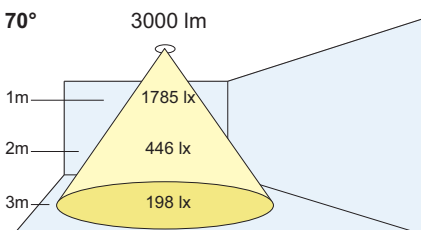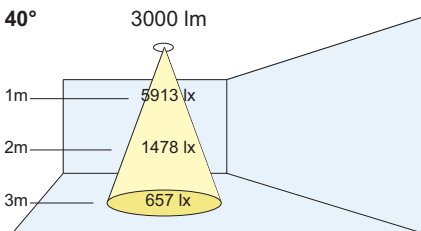

PRODUCT CODE

Lumen Output:

- (05) 500 lm
- (07) 700 lm
- (10) 1000 lm
- (13) 1300 lm
- (20) 2000 lm
- (30) 3000 lm

Colour Temps:

- (27) 2700K
- (30) 3000K
- (35) 3500K
- (40) 4000K

Colour Rendering:

- (V8) Vibrancy 80
- (V9) Vibrancy 98
- (80) CRI 80+
- (98) CRI 98

(CRI 98 / V9 up to 2000 lumens)

Beam Angles:

- (N) Narrow: 20°
- (M) Medium: 40°
- (W) Wide: 70°

(20° up to 2000lm CRI 80 & 1300 CRI 98)

Colour:

- (W) White

P2 - - - - - / ** / **

Options:

- Dimming:**
 - /DT Trailing Edge
 - /DL Leading Edge
 - /DD DALI
 - /DA Analogue (1-10V)
 - /LT Lumentalk
- /M3 3Hrs Maintained
- /ST Self Test
- /DE DALI Emergency

(Other dimming options available see page 123)