


90 SERIES SOFT 90

- Fixed downlight with shallow set reflector
- Die-cast construction
- Glare control secondary reflector
- Various reflector options (including 20°)
- Supplied with pre-wired remote non-dimming driver
- AlphaLED Fast Fix mechanism
- IP44 glass option

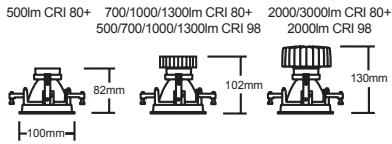




Cut Out: Ø92mm
(For spot beam option: add 30mm to the height)

Accessories

To order, use the following suffix



- /CG IP44 Glass
- /HL Honeycomb louvre
- /SL Softening Lens

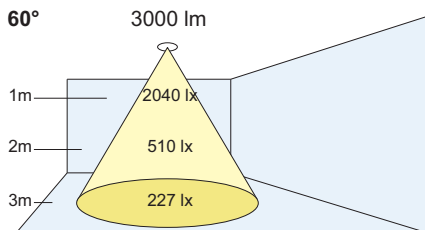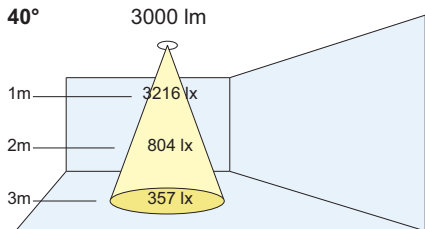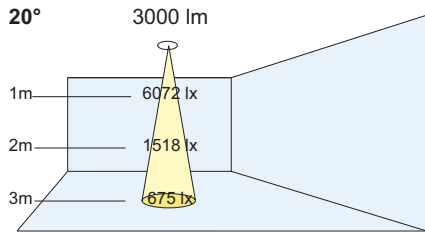

PRODUCT CODE

Lumen Output:

(05)	500 lm
(07)	700 lm
(10)	1000 lm
(13)	1300 lm
(20)	2000 lm
(30)	3000 lm

Colour Temps:

(27)	2700K
(30)	3000K
(35)	3500K
(40)	4000K

Colour Rendering:

(V8)	Vibrancy 80
(V9)	Vibrancy 98
(80)	CRI 80+
(98)	CRI 98

(CRI 98 / V9 up to 2000 lumens)

Beam Angles:

(S)	Spot: 10°
(N)	Narrow: 20°
(M)	Medium: 40°
(W)	Wide: 60°

(10° up to 2000lm CRI 80 & 1300 CRI 98)

Colour:

(W)	White
-----	-------

S7

/**/**

Options:

Dimming:

/DT Trailing Edge

/DL Leading Edge

/DD DALI

/DA Analogue (1-10V)

/LT Lumentalk

(Other dimming options available see page 123)

/M3 3Hrs Maintained

/ST Self Test

/DE DALI Emergency