
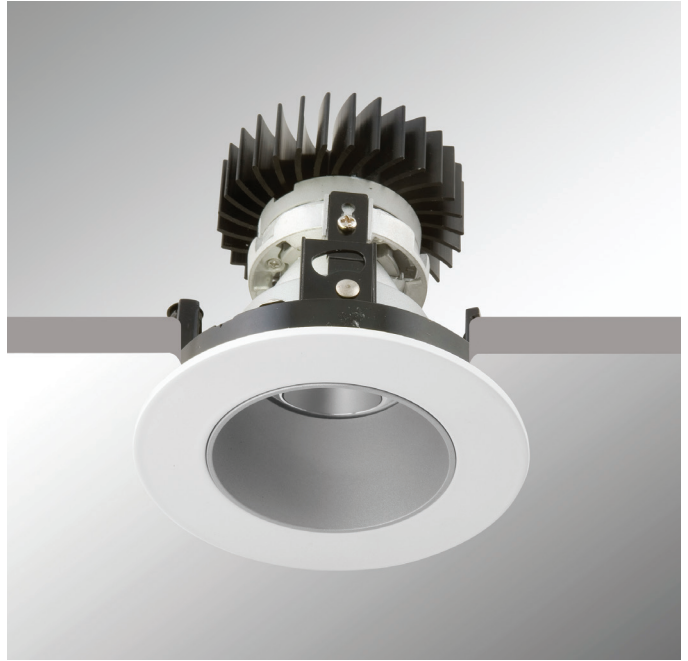


90 SERIES



SOFT ROUND

- Fixed recessed downlight with deep set reflector
- Die-cast construction
- Glare control secondary reflector
- Supplied with pre-wired remote non-dimming driver
- AlphaLED Fast Fix mechanism

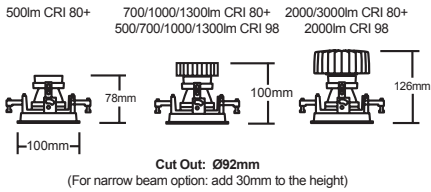

Accessories

To order, use the following suffix



- /HL Honeycomb louvre
- /SL Softening Lens
- /CG Clear glass

PRODUCT CODE

Lumen Output:

_____	(05)	500 lm
_____	(07)	700 lm
_____	(10)	1000 lm
_____	(13)	1300 lm
_____	(20)	2000 lm
_____	(30)	3000 lm

Colour Temps:

_____	(27)	2700K
_____	(30)	3000K
_____	(35)	3500K
_____	(40)	4000K

Colour Rendering:

_____	(V8)	Vibrancy 80
_____	(V9)	Vibrancy 98
_____	(80)	CRI 80+
_____	(98)	CRI 98

(CRI 98 / V9 up to 2000 lumens)

Beam Angles:

_____	(N)	Narrow: 20°
_____	(M)	Medium: 40°
_____	(W)	Wide: 60°

(20° up to 2000lm CRI 80 & 1300 CRI 98)

Colour:

_____	(W)	White
-------	-----	-------

S5

_____ / ** / **

- Options:
- Dimming: /M3 3Hrs Maintained
 - /DT Trailing Edge
 - /DL Leading Edge
 - /DD DALI
 - /DA Analogue (1-10V)
 - /LT Lumentalk
 - /ST Self Test
 - /DE DALI Emergency
- (Other dimming options available see page 123)*

