
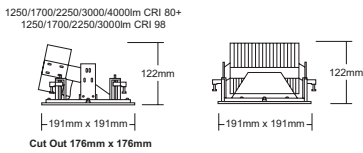


200 SERIES


SQUARE ASYMMETRIC

- High output recessed asymmetric downlight
- Die-cast construction
- IP44 under canopy glass option
- Supplied with pre-wired remote non-dimming driver
- AlphaLED Fast Fix mechanism
- Ideal replacement for CFL and metal halide

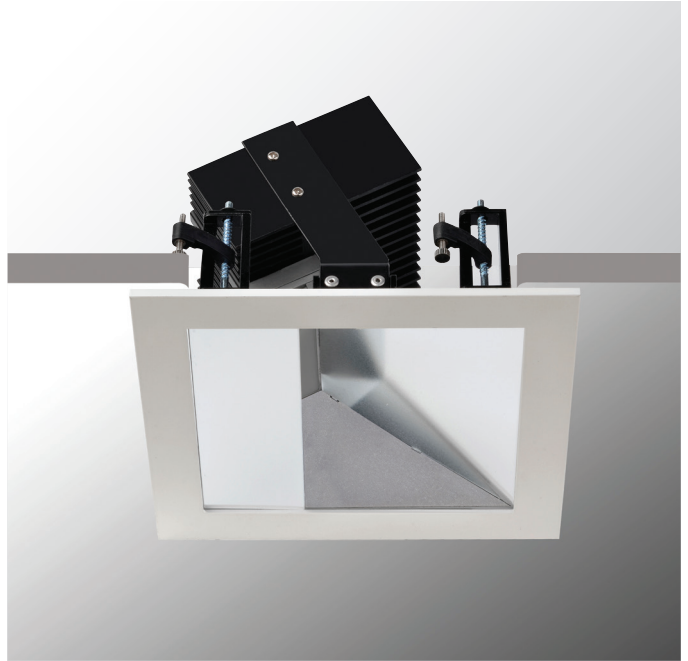

Accessories

To order, use the following suffix



- /CG** IP44 Cover glass
- /HL** Honeycomb louvre

PRODUCT CODE

Lumen Output:

- (12) 1250 lm
- (17) 1700 lm
- (22) 2250 lm
- (30) 3000 lm
- (40) 4000 lm

Colour Temps:

- (27) 2700K
- (30) 3000K
- (35) 3500K
- (40) 4000K

Colour Rendering:


- (80) CRI 80+
 - (98) CRI 98
- (CRI 98 Up to 3000 lumens)*

Beam Angles:

- (W) Wide

Colour:

- (W) White
- (B) Black

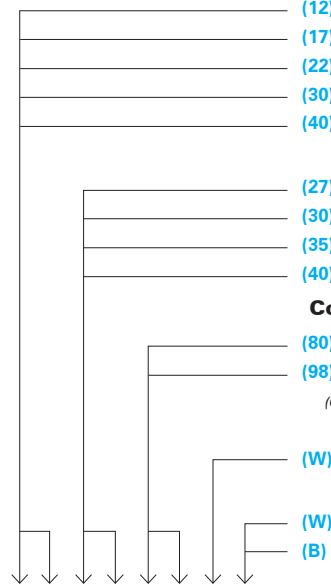

SA _____ / ** / **

Options:

- Dimming:**
 - /DT Trailing Edge
 - /DL Leading Edge
 - /DD DALI
 - /DA Analogue (1-10V)
 - /LT Lumentalk
- /M3 3Hrs Maintained
- /ST Self Test
- /DE DALI Emergency

(Other dimming options available see page 123)

