


100 SERIES

UNIVERSAL ADJUSTABLE


- High output fully adjustable downlighter
- Die-cast construction with protective clear glass
- Supplied with pre-wired non dimmable driver
- Versatile range of beam angles

500/700/1000/1300lm CRI 80+
500/700/1000/1300lm CRI 98

2000/3000lm CRI 80+
2000lm CRI 98

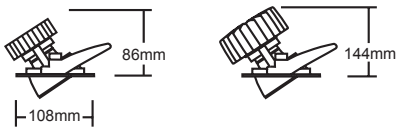

Cut Out: Ø102mm
(For Spot beam option: add 30mm to the height)



Satin Nickel option

PRODUCT CODE

Lumen Output:

- (05) 500 Im
- (07) 700 Im
- (10) 1000 Im
- (13) 1300 Im
- (20) 2000 Im
- (30) 3000 Im

Colour Temps:

- (27) 2700K
- (30) 3000K
- (35) 3500K
- (40) 4000K

Colour Rendering:

- (V8) Vibrancy 80
 - (V9) Vibrancy 98
 - (80) CRI 80+
 - (98) CRI 98
- (CRI 98 / V9 up to 2000 lumens)*




Beam Angles:

- (S) Spot: 10°
- (N) Narrow: 20°
- (M) Medium: 40°
- (W) Wide: 60°

(10° up to 2000lm CRI 80 & 1300 CRI 98)

Colour:

- (W) White
- (B) Black
- (N) Nickel Satin

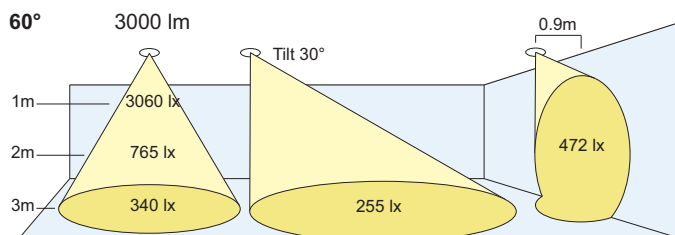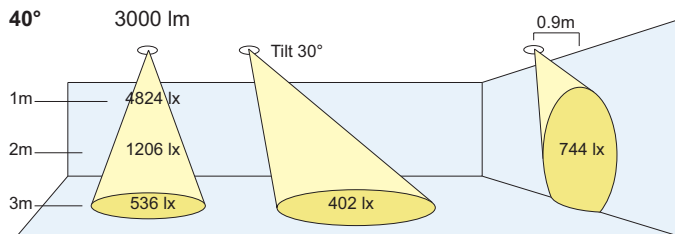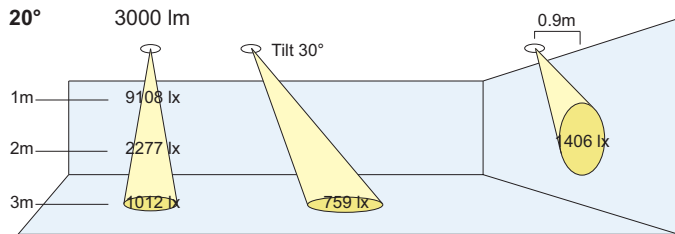

UA _____ / ** / **

Options:

Dimming:

- /DT Trailing Edge
- /DL Leading Edge
- /DD DALI
- /DA Analogue (1-10V)
- /LT Lumentalk
- /M3 3Hrs Maintained
- /ST Self Test
- /DE DALI Emergency

(Other dimming options available see page 123)