


**100 SERIES**


# UNIVERSAL OPEN

- Fixed recessed downlight with deep set reflector
- Die-cast construction
- Glare control secondary reflector
- Supplied with pre-wired remote non-dimming driver
- Decorative range of accessories

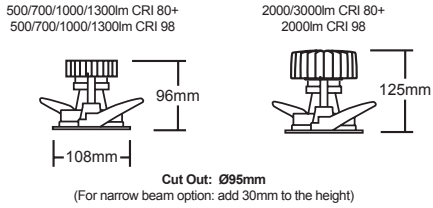

### Accessories

To order, use the following suffix



Nickel Satin option



### PRODUCT CODE

**Lumen Output:**

- (05) 500 lm
- (07) 700 lm
- (10) 1000 lm
- (13) 1300 lm
- (20) 2000 lm
- (30) 3000 lm

**Colour Temps:**

- (27) 2700K
- (30) 3000K
- (35) 3500K
- (40) 4000K

**Colour Rendering:**

- (V8) Vibrancy 80
- (V9) Vibrancy 98
- (80) CRI 80+
- (98) CRI 98

*(CRI 98 / V9 up to 2000 lumens)*



**Beam Angles:**

- (N) Narrow: 20°
- (M) Medium: 40°
- (W) Wide: 60°


*(20° up to 2000lm CRI 80 & 1300 CRI 98)*

**Colour:**

- (W) White
- (B) Black
- (N) Nickel Satin

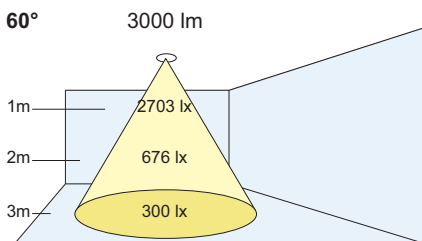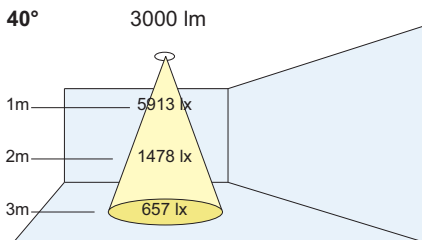

**UO**

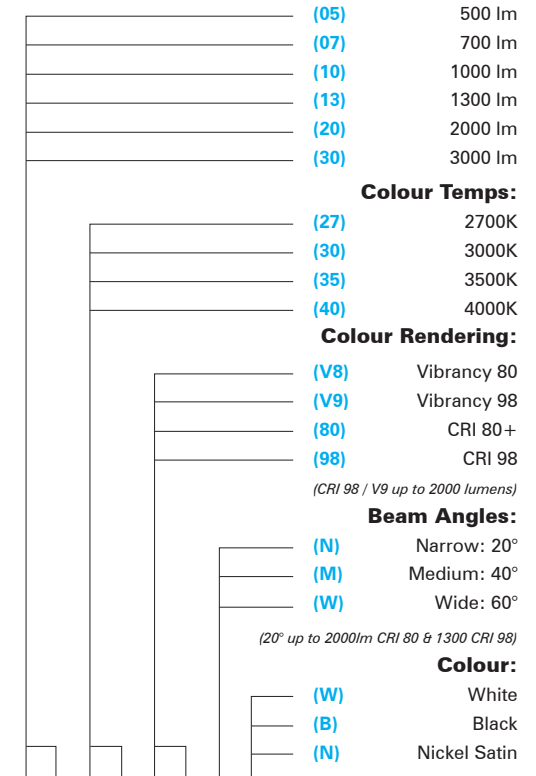

- Options:**
- Dimming:**
  - /DT Trailing Edge
  - /DL Leading Edge
  - /DD DALI
  - /DA Analogue (1-10V)
  - /LT Lumentalk
  - /M3 3Hrs Maintained
  - /ST Self Test
  - /DE DALI Emergency
- (Other dimming options available see page 123)*