


200 SERIES XIRIUS

- High output recessed downlight
- Die-cast construction
- IP44 under canopy glass option
- Supplied with pre-wired remote non-dimming driver
- AlphaLED Fast Fix mechanism
- Ideal replacement for CFL and metal halide

1250/1700/2250/3000/4000lm CRI 80+
1250/1700/2250/3000lm CRI 98




Accessories


To order, use the following suffix



Astral Bezel option /AB



Factory fitted accessory that extends the bezel to a cutout range of 210mm to 240mm.



- /HL Honeycomb louvre
- /CG IP44 Cover glass

PRODUCT CODE

Lumen Output:

- (12) 1250 lm
- (17) 1700 lm
- (22) 2250 lm
- (30) 3000 lm
- (40) 4000 lm

Colour Temps:

- (27) 2700K
- (30) 3000K
- (35) 3500K
- (40) 4000K

Colour Rendering:


- (80) CRI 80+
 - (98) CRI 98
- (CRI 98 Up to 3000 lumens)*

Beam Angles:

- (W) Wide

Colour:

- (W) White

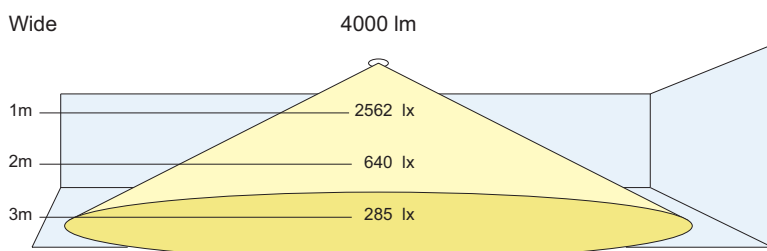

XS

Options:

Dimming:

- /DT Trailing Edge
- /DL Leading Edge
- /DD DALI
- /DA Analogue (1-10V)
- /LT Lumentalk

(Other dimming options available see page 123)

- /M3 3Hrs Maintained
- /ST Self Test
- /DE DALI Emergency