



200 SERIES XIRIUS SOFT

- Low height, high output downlight
- Diffuser and faceted reflector for reduced glare
- Larger version available (Ø260mm)
- IP44 under canopy glass option
- Supplied with pre-wired remote non-dimming driver
- AlphaLED Fast Fix mechanism
- Ideal replacement for CFL

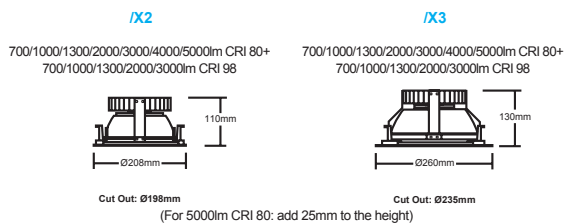

Accessories

To order, use the following suffix

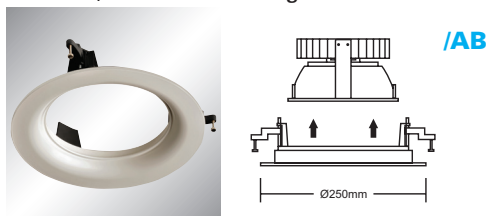

Factory fitted accessory that extends the bezel to a cutout range of 210mm to 240mm.

Only available with the X2



- /AB** Astral Bezel option
- /CG** Lens option/IP44 canopy glass
- /GR** Decorative glass ring
- /MR** Matt reflector version

PRODUCT CODE

Lumen Output:

- (07) 700 lm
- (10) 1000 lm
- (13) 1300 lm
- (20) 2000 lm
- (30) 3000 lm
- (40) 4000 lm
- (50) 5000 lm

Colour Temps:

- (27) 2700K
- (30) 3000K
- (35) 3500K
- (40) 4000K

Colour Rendering:


- (V8) Vibrancy 80
 - (V9) Vibrancy 98
 - (80) CRI 80+
 - (98) CRI 98
- (CRI 98 / V9 up to 2000 lumens)

Beam Angles:

- (W) Wide

Colour:

- (W) White

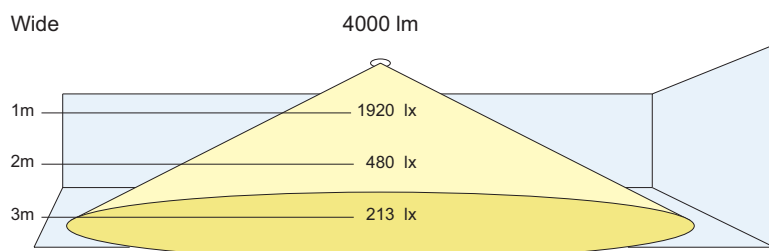

X2

// ****

Options:

Dimming:

- /DT** Trailing Edge
- /DL** Leading Edge
- /DD** DALI
- /DA** Analogue (1-10V)
- /LT** Lumentalk

/M3 3Hrs Maintained

/ST Self Test

/DE DALI Emergency

(Other dimming options available see page 123)